

PRESS RELEASE

Transparent, electrically conductive network of encapsulated silver nanowires – a novel electrode for optoelectronics

A team headed by Prof. Silke Christiansen has developed a transparent electrode with high electrical conductivity for solar cells and other optoelectronic components – that uses minimal amounts of material. It consists of a random network of silver nanowires that is coated with aluminium-doped zinc oxide. The novel electrode requires about 70 times less silver than conventional silver grid electrodes, but possesses comparable electrical conductivity.

The electrodes for connections on the “sunny side” of a solar cell need to be not just electrically conductive, but transparent as well. As a result, electrodes are currently made either by using thin strips of silver in the form of a coarse-meshed grid squeegeed onto a surface, or by applying a transparent layer of electrically conductive indium tin oxide (ITO) compound. Neither of these are ideal solutions, however. This is because silver is a precious metal and relatively expensive, and silver particles with nanoscale dimensions oxidise particularly rapidly; meanwhile, indium is one of the rarest elements on earth crust and probably will only continue to be available for a few more years.

Mesh of silver nanowires

Manuela Göbelt on the team of Prof. Silke Christiansen has now developed an elegant new solution using only a fraction of the silver and entirely devoid of indium to produce a technologically intriguing electrode. The doctoral student initially made a suspension of silver nanowires in ethanol using wet-chemistry techniques. She then transferred this suspension with a pipette onto a substrate, in this case a silicon solar cell. As the solvent is evaporated, the silver nanowires organise themselves into a loose mesh that remains transparent, yet dense enough to form uninterrupted current paths.

Encapsulation by AZO crystals

Subsequently, Göbelt used an atomic layer deposition technique to gradually apply a coating of a highly doped wide bandgap semiconductor known as AZO. AZO consists of zinc oxide that is doped with aluminium. It is much less expensive than ITO and just as transparent, but not quite as electrically conductive. This process caused tiny AZO crystals to form on the silver nanowires, enveloped them completely, and finally filled in the interstices. The silver nanowires, measuring about 120 nanometres in diameter, were covered with a layer of about 100 nanometres of AZO and encapsulated by this process.

Berlin, July-31-2015


additional information:

Prof. Dr. Silke Christiansen
Institute of Nano-architectures for
Energy Conversion
silke.christiansen@helmholtz-berlin.de

Manuela Göbelt
Max Planck Institute for the
Science of Light
Fon: +49 (0) 9131 6877 551
manuela.goebelt@mpl.mpg.de

Press Officee

Dr. Antonia Rötger
Fon: +49 (0)30-8062-43733
Fax: +49 (0)30-8062-42998
antonia.roetger@helmholtz-berlin.de

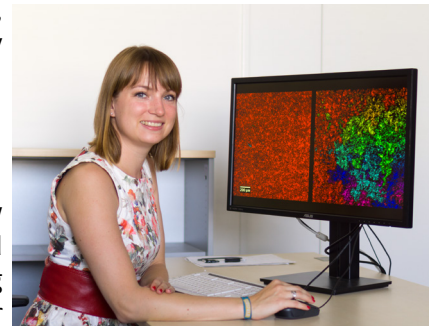

Manuela Göbelt is evaluating SEM-images to calculate the local degree of networking.

Photo: Björn Hoffmann

Quality map calculated

Measurements of the electrical conductivity showed that the newly developed composite electrode is comparable to a conventional silver grid electrode. However, its performance depends on how well the nanowires are interconnected, which is a function of the wire lengths and the concentration of silver nanowires in the suspension. The scientists were able to specify the degree of networking in advance with computers. Using specially developed image analysis algorithms, they could evaluate images taken with a scanning electron microscope and predict the electrical conductivity of the electrodes from them.

“We are investigating where a given continuous conductive path of nanowires is interrupted to see where the network is not yet optimum”, explains Ralf Keding. Even with high-performance computers, it still initially took nearly five days to calculate a good “quality map” of the electrode. The software is now being optimised to reduce the computation time. “The image analysis has given us valuable clues about where we need to concentrate our efforts to increase the performance of the electrode, such as increased networking to improve areas of poor coverage by changing the wire lengths or the wire concentration in solution”, says Göbelt.

Practical alternative to conventional electrodes

“We have developed a practical, cost-effective alternative to conventional screen-printed grid electrodes and to the common ITO type that is threatened however by material bottlenecks”, says Christiansen, who heads the Institute of Nanoarchitectures for Energy Conversion at HZB and additionally directs a project team at the Max Planck Institute for the Science of Light (MPL).

Only a fraction of silver, nearly no shadow effects

The new electrodes can actually be made using only 0.3 grams of silver per square metre, while conventional silver grid electrodes require closer to between 15 and 20 grams of silver. In addition, the new electrode casts a considerably smaller shadow on the solar cell. “The network of silver nanowires is so fine that almost no light for solar energy conversion is lost in the cell due to the shadow”, explains Göbelt. On the contrary, she hopes “it might even be possible for the silver nanowires to scatter light into the solar cell absorbers in a controlled fashion through what are known as plasmonic effects.”

Published in [Nano Energy, Vol. 16](#), Sept. 2015: "Encapsulation of silver nanowire networks by atomic layer deposition for indium-free transparent electrodes". Manuela Göbelt, Ralf Keding, Sebastian W. Schmitt, Björn Hoffmann, Sara Jäckle, Michael Latzel, Vuk V. Radmilović, Velimir R. Radmilović, Erdmann Spiecker, Silke Christiansen.

[doi:10.1016/j.nanoen.2015.06.027](https://doi.org/10.1016/j.nanoen.2015.06.027)

The **Helmholtz-Zentrum Berlin für Materialien und Energie (HZB)** operates and develops large scale facilities for research with photons (synchrotron beams) and neutrons. The experimental facilities, some of which are unique, are used annually by more than 2,500 guest researchers from universities and other research organisations worldwide. Above all, HZB is known for the unique sample environments that can be created (high magnetic fields, low temperatures). HZB conducts materials research on themes that especially benefit from and are suited to large scale facilities. Research topics include magnetic materials and functional materials. In the research focus area of solar energy, the development of thin film solar cells is a priority, whilst chemical fuels from sunlight are also a vital research theme. HZB has approx. 1,100 employees of whom some 800 work on the Lise-Meitner Campus in Wannsee and 300 on the Wilhelm-Conrad-Röntgen Campus in Adlershof.

HZB is a member of the Helmholtz Association of German Research Centres, the largest scientific organisation in Germany.